Steinmeyer
Mechatronik

DT155-2LM

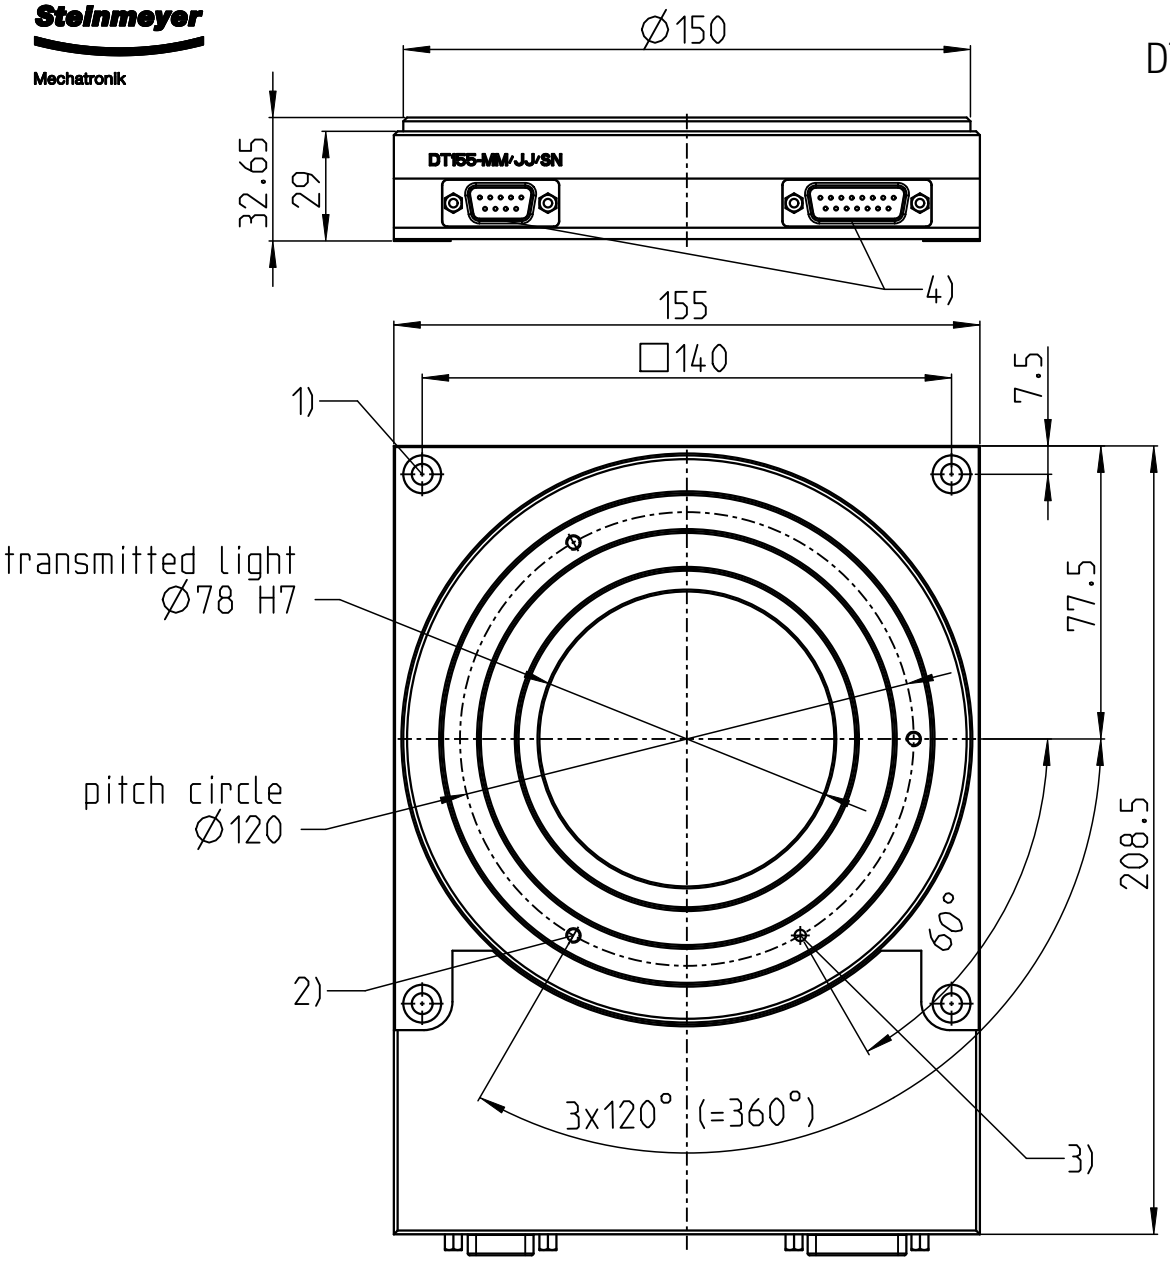

1) counterbore for screw DIN 912 / ISO 4782 - M5 (4x)
2) M4; depth 4 (3x)
3) Ø 3H7; depth 4
4) terminal (number and types of connectors depending on selected equipment)

requirement on mounting surfaces: flatness 0.05 mm

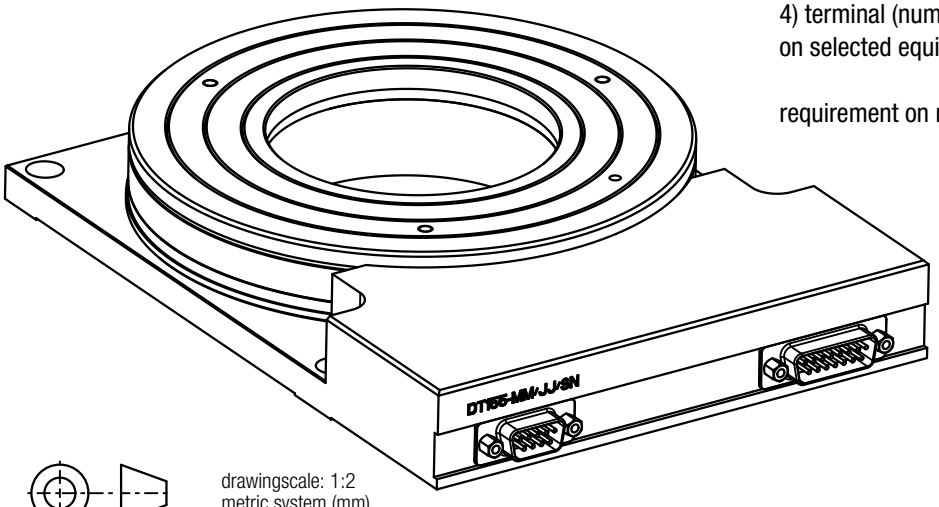

drawingscale: 1:2
metric system (mm)

Revision 04/2026
Doc-Nr. 567740

Steinmeyer Mechatronik GmbH | Fritz-Schreiter-Straße 32 | D-01259 Dresden | info@steinmeyer-mechatronik.de | Tel.: +49 351 885850