
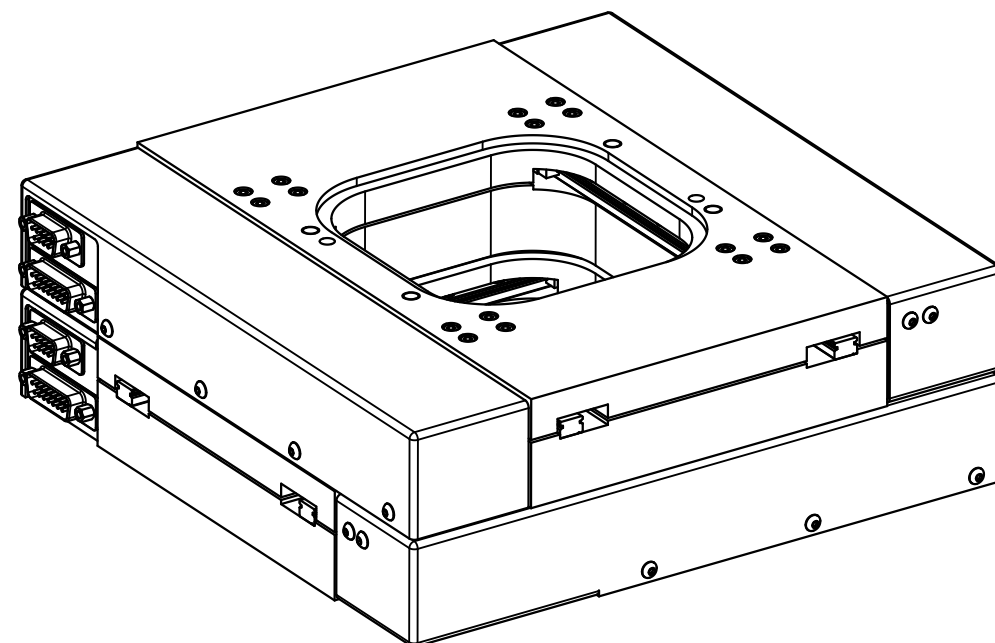
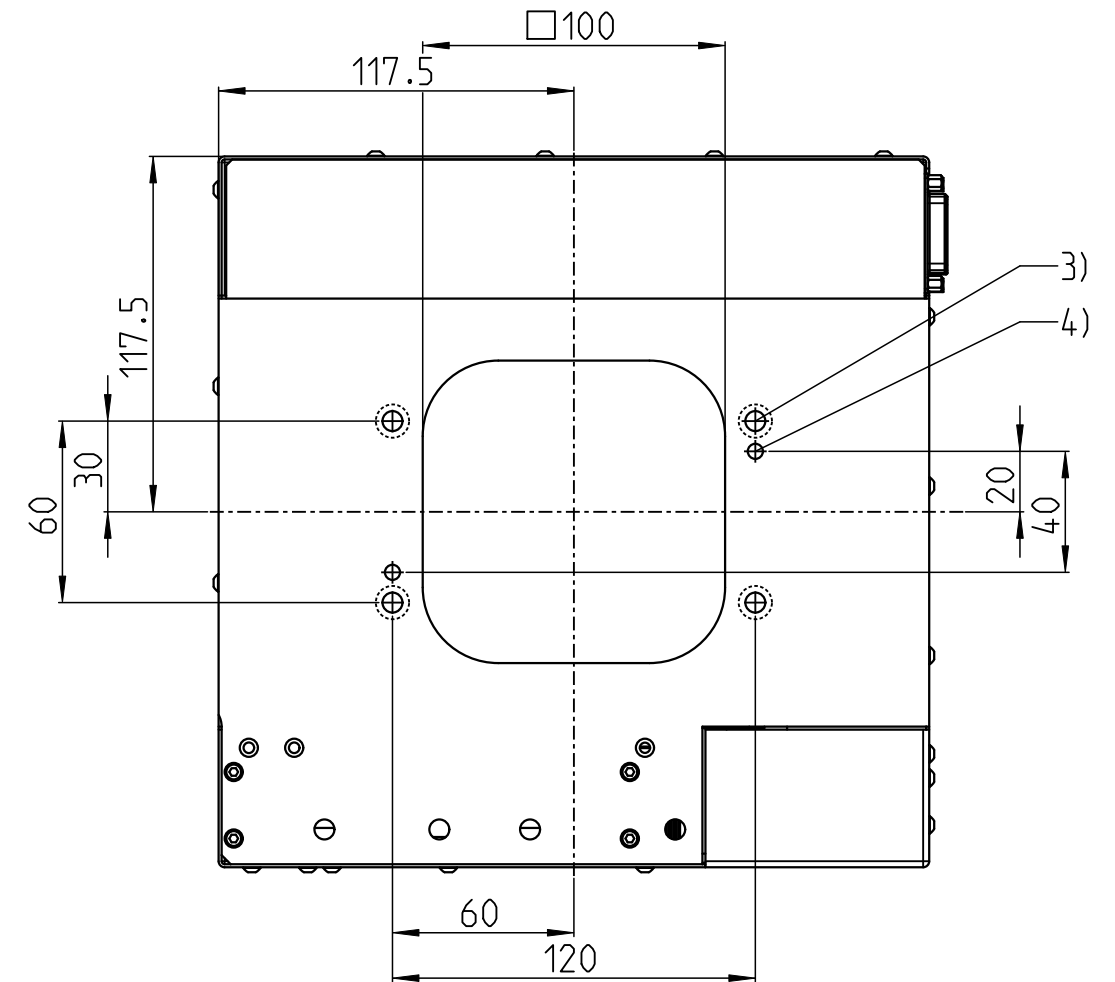
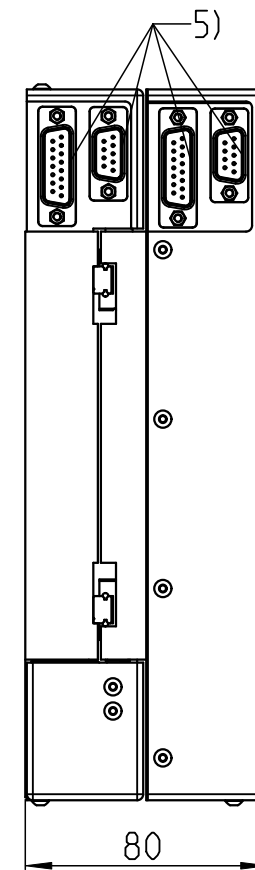


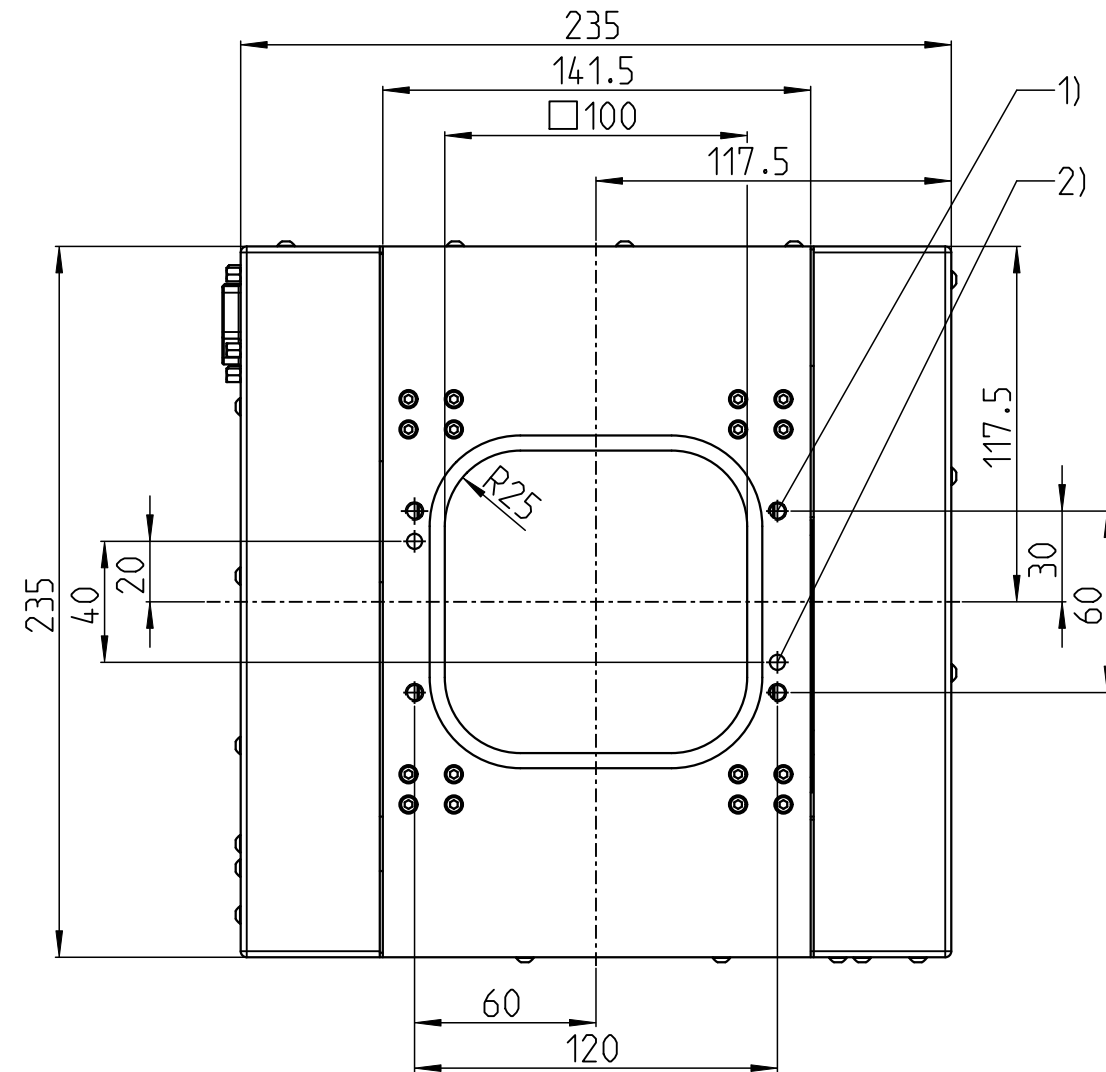

*) positional accuracy between fits: $\oplus 0.02$

- 1) M6; depth 10 (4x)
- 2) $\text{Ø } 5\text{H7}$; depth 5 (2x)

- 3) counterbore for screw DIN 912 / ISO 4782 - M6 (4x) used from top-side
- 4) $\text{Ø } 5\text{H7}$; depth 6 (2x)

- 5) terminal (number and types of connectors depending on selected equipment)

requirement on mounting surfaces: flatness 0.02 mm