




*) positional accuracy between fits: $\oplus 0.04$

- 1) M6; depth 8 (4x) used from top-side
- 2) counterbore for screw DIN 912 / ISO 4782 - M6 (4x) used from top-side
- 3) $\varnothing 6H7$; depth 12 (2x)

requirement on mounting surfaces: flatness 0.05 mm

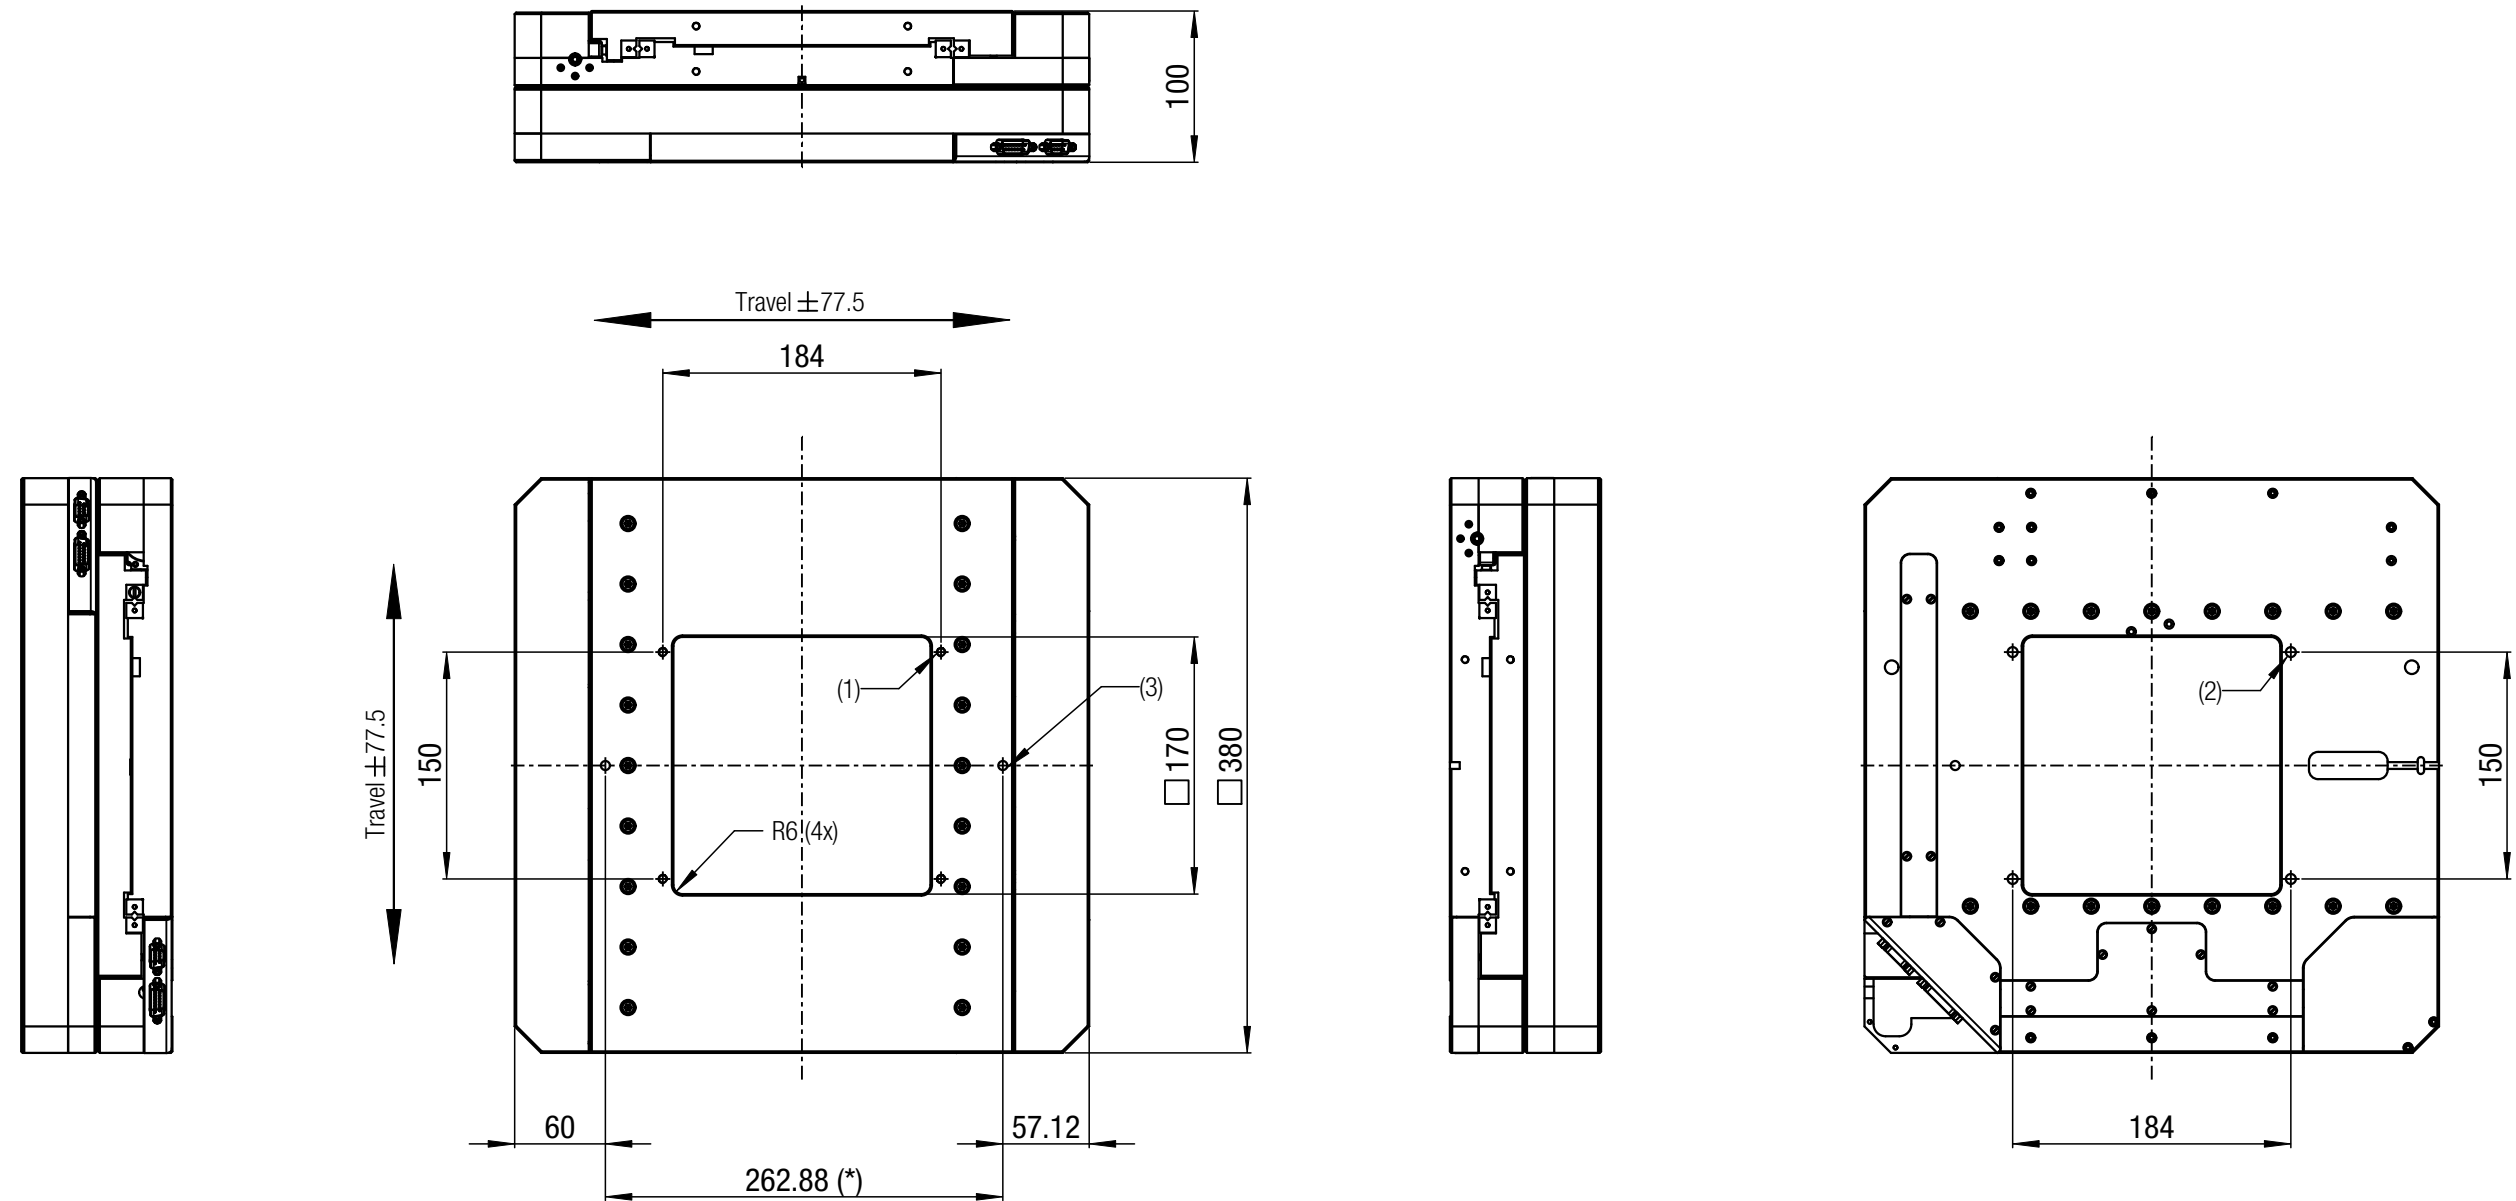